

## SCREW AIR COMPRESSOR MODEL: LW-20PM-16Q




### BRIEF INTRODUCTION:

- An integrated system, easy installation, easy operation
- VSD control screw unit is energy saving, stable working and quiet
- Plate heat exchange type refrigerant hair dryer integrated to get dew point +3°C~+10°C, no water in air
- Multi-level precision filter filtration  
No dust, No oil, No water for pure air source
- Mounted on 500 liters horizontal CE air tank
- Centralized automatic water drainage system, easy, convenient

## FEATURES:

1. Rotary screw compressor unit, reliable screw block.
2. Efficient permanent magnet motor, energy saving, noise reduction to be quiet working
3. Various speed drive by frequency inverter, power saving, self-adjustment
4. Touch screen controller to realize intelligence interaction
5. Package system, convenient installation, just plug and work immediately
6. Compact design, system integration, working anywhere anytime
7. Plate heat exchange type refrigerant air dryer integrated to get dew point +3°C~+10°C, no water in air
8. Multi-level Precision Filter, No dust, No oil, No water for pure air source
9. Automatic water drainage system.
10. Low noise and high flow fan design for effective cooling, reliable system

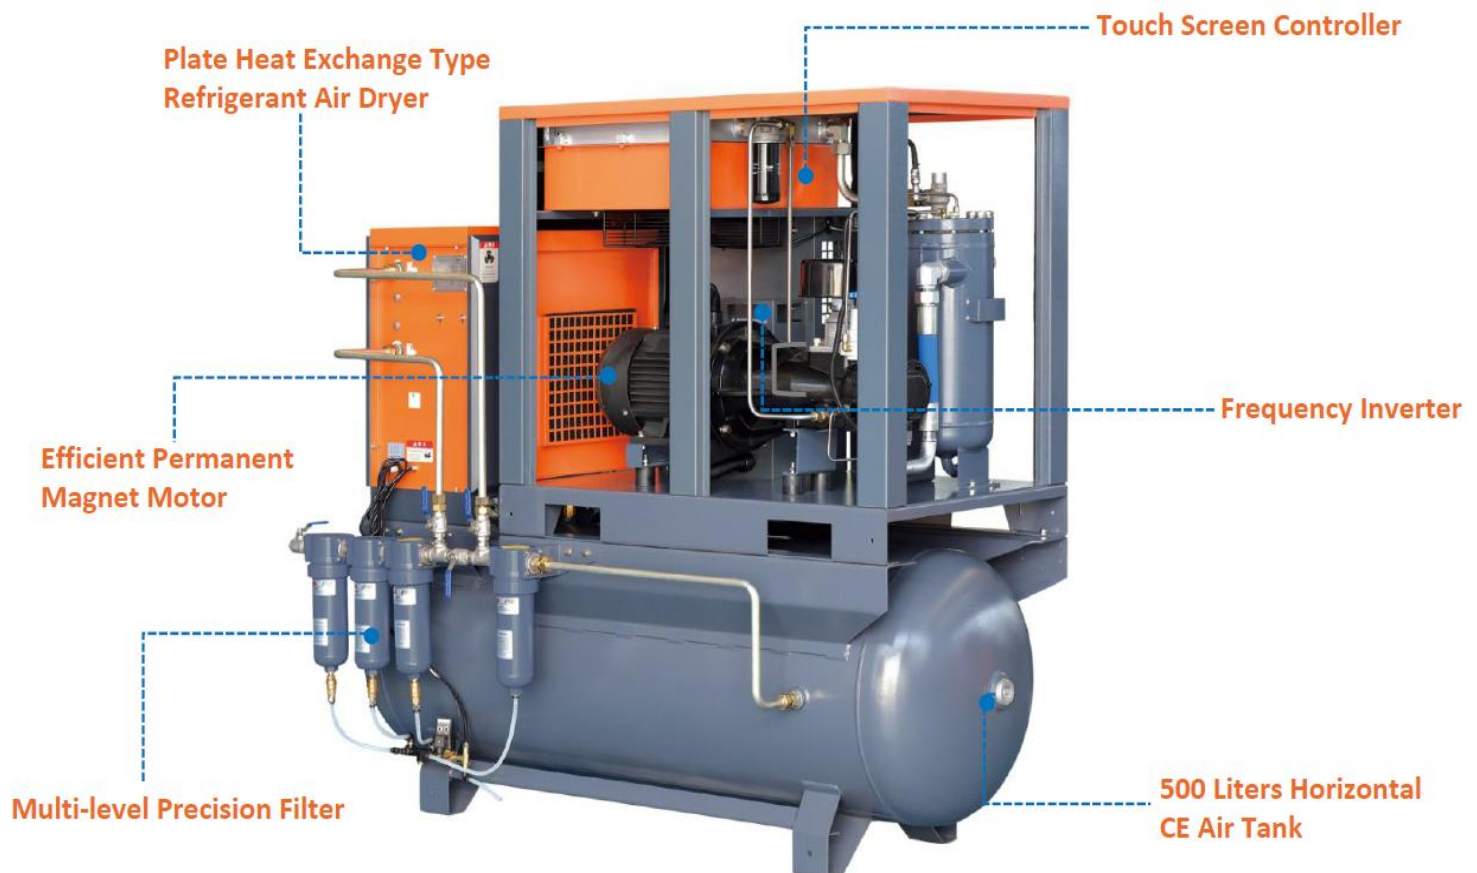



## TECHNICAL PARAMETER:

Model	LW-20PM-16Q		
Specification	F.A.D	: 1.3m <sup>3</sup> /min	46cfm
	Max exhaust air pressure	: 16Bar	232psi
	Motor Power	: 15KW	20HP
	Volt./ph./Hz	: 380V/3ph/50Hz	
	Drive way	: direct drive	
	Cooling way	: Air cooling	
	Control way	: VSD control	
	Dimension (L x W x H)	: 1950 x 950 x 1690mm	
	Weight	: 690kg	
	Air outlet port size	: G3/4	
	d(B)A	: 68±2	
	Air purified filters	Num.	: 4pcs, 4 filtration grade
Dust		: ≤0.01µm	
Oil		: ≤0.001ppm	
Refrigerant Air dryer	Type	: plate heat exchange type	
	Pressure dew point	: 3~10°C	
Air tank	Type	: horizontal	
	Standard	: CE certificated	
	capacity	: 500 liters	
<b>Brand New</b>		<b>: China</b>	